



Product Standards: DIN40736 and IEC896-1

Dimensions(mm)





Terminal type: M10 bolt
Coloure: blue transparent

Specifications

Nominal voltage	2V	
Rated capacity (10 hour rate)	1500Ah	
Dimension	Length (L)	210mm
	Width (W)	275mm
	Height (h)	795mm
	Total height (H)	850mm
Approx. mass (without electrolyte)	87.0Kg	
Approx. mass (with electrolyte)	114.3Kg	

Basic electric performance parameters(20°C)

Discharge rate	Cut-off voltage (V)	Capacity (Ah)
		1.240±0.005g/cm ³
1 hour rate	1.67	744
3 hour rate	1.75	1116
5 hour rate	1.77	1260
8 hour rate	1.80	1425
10 hour rate	1.80	1500
20 hour rate	1.85	1620
72 hour rate	1.85	2100
96 hour rate	1.85	2115
120 hour rate	1.85	2130
240 hour rate	1.85	2190

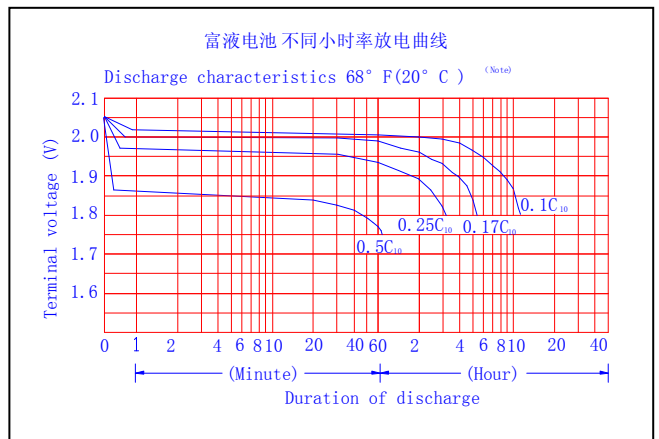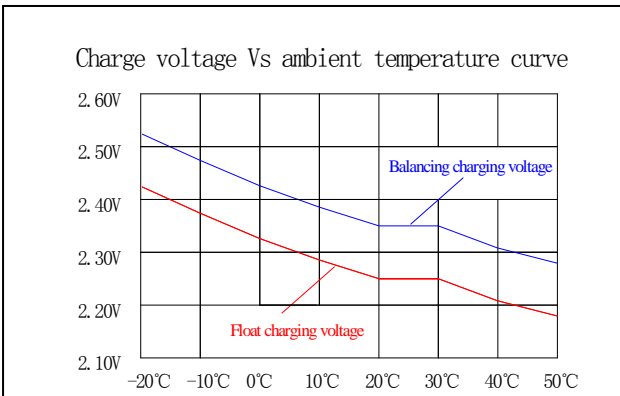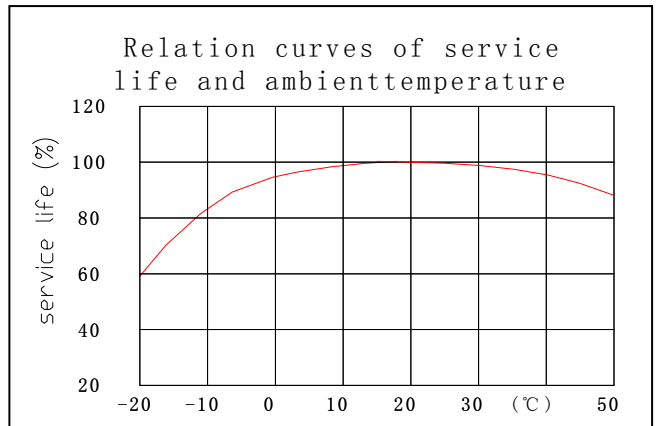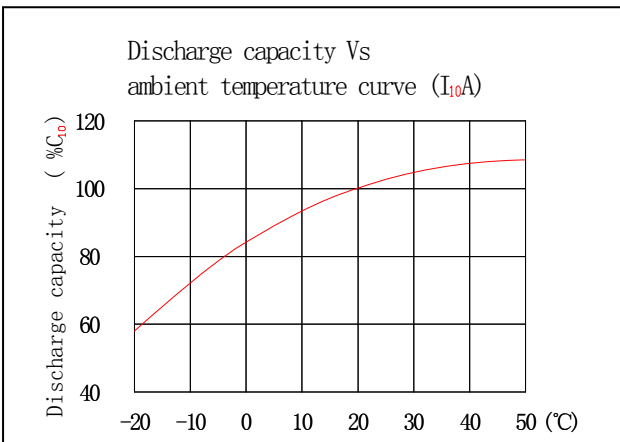

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Solar Guru for the latest information.